



## 5MP Indoor Fixed-focal Wi-Fi Pan & Tilt Network Camera

# DH-H5B



### Series Overview

Dahua Wireless series cameras are not only easy to install and operate, but also perform outstandingly and cost-effective. They provide full coverage of a scene with 5MP resolution, 0° to 350° pan and -5° to 80° tilt. Their powerful functions, such as one-click proactive call, preset patrol, AI human detection & pet detection, and auto tracking, assist with the accurate detection and continuous tracking of targets. Information is also synchronously sent to your phone to keep you up-to-date. These cameras are widely used in small and medium-sized scenes such as small-sized retail stores.



#### 5MP

Clear images with sharp details



#### Day&Night

Clear images even at night



#### One Camera for 360° View

360° monitoring without blind spots



#### One-click Proactive Call

Proactive bidirectional call anytime, anywhere



#### AI Human Detection

Focuses on what matters and reduces false alarms



#### Pet Detection

Focuses on what matters and reduces false alarms



#### Preset Patrol

Guards the places that matter to you regularly



#### Auto Tracking

Automatic tracking of targets



#### One-click Privacy Mode

Protects your privacy



#### Abnormal Sound Alarm

Detects abnormal sounds and sends alarms in time



#### Wi-Fi 6

Seamless integration of speed and anti-interference



#### Bluetooth Pairing

Fast pairing with Bluetooth



#### H.265

Advanced H.265 compression technology



#### Supports Micro SD Card


Low-cost storage



## Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.



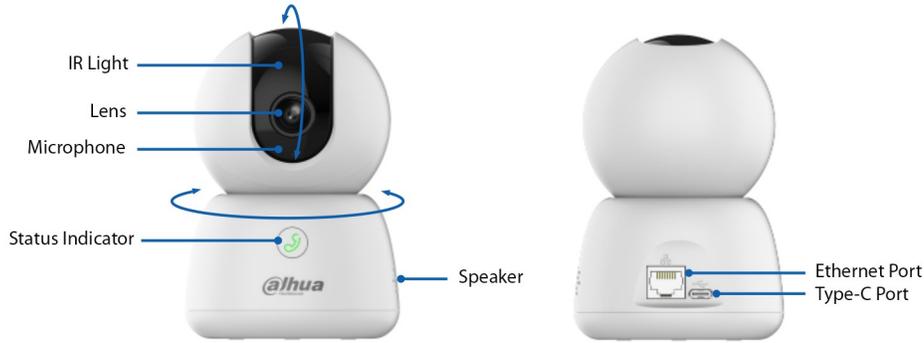

# Specifications

## Camera

Image Sensor	1/3" CMOS
Max. Resolution	2880 (H) × 1620 (V)
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Illumination Distance	Up to 10 m (32.81 ft) (IR)
Illuminator On/Off Control	Auto
Illuminator Number	1 (IR LED)
Angle Adjustment	Tilt: -5° to 80° Pan: 0° to 350°

## Lens

Max. Aperture	F2.0
Field of View	2.8mm: H: 99°; V: 55°; D: 115° 3.6mm: H: 74°; V: 41°; D: 88°

## Intelligence

Human Detection	Yes
-----------------	-----

## Video

Video Compression	H.265
Video Frame Rate	Main stream: 2880 × 1620@(1-25/30 fps) sub stream: 640 × 360@(1-25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Resolution	5M (2880 × 1620); nHD (640 × 360)
Video Bit Rate	H.265: 40 kbps–4096 kbps
Day/Night	Auto(ICR)/Color/B/W
WDR	DWDR
Motion Detection	Yes
Image Rotation	0°/180°

## Audio

Built-in MIC	Yes
Built-in Speaker	Yes
Audio Compression	G.711a

## Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE 802.11b/g/n/ax 2.412-2.472 GHz, 2.4 G, ≤20dBm@2400-2483.5MHz
Storage	Micro SD card (up to 256 GB)
Management Software	DMSS
Mobile Client	iOS;Android

## Certification

Certifications	CE
----------------	----

## Power

Power Supply	5 VDC, 1 A
Power Consumption	Basic: 1.9 W; Max.: 3.8 W (live + IR + PT rotation)

## Environment

Operating Temperature	-10 °C to +45 °C (+14 °F to +113 °F)
Operating Humidity	≤95%

## Structure

Casing Material	Plastic
Product Dimensions	φ84 mm × 123.8 mm (φ3.31" × 4.87")
Net Weight	206.5 g (0.46 lb)

# What's in the box

 × 1
 

<b>Tools:</b> Installation Position Map × 1 Screw Package × 1 Power Cord × 1	<b>Documents:</b> Bracket × 1 Quick Start Guide × 1 Legal and regulation information × 1	<b>Power:</b> QR Code × 1 Power Adapter × 1
---	---	---

